



TYPICAL ANALYSIS


Copper	> 99.98%	Lead	0.0001%
Antimony	0.0001%	Nickel	0.0005%
Arsenic	0.00005%	Selenium	0.00005%
Bismuth	0.00001%	Silver	0.0005%
Chlorine	0.0005%	Sulphur	0.0005%
Cobalt	0.0001%	Tellurium	0.00005%
Iron	0.0001%		



Glencore's COPPER is guaranteed to meet the chemical requirements of BS EN 1978:1998 Copper Cathodes (Cathode grade designation Cu>CATH>1).

Material Safety Data Sheet available upon request.

STANDARD PACKAGING

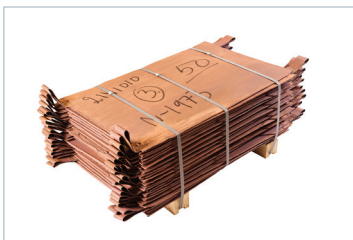

Whole Cathode

PRODUCT DESCRIPTION

Glencore's Nikkelverk refinery is recognized as a dependable supplier of quality COPPER products. The FHG brand of COPPER is a registered LME Grade A cathode, and is used in high quality applications where electrical conductivity is critical.

Glencore's Nikkelverk COPPER is in the form of whole cathode and is bundled on wooden skids. The dimension of the cathode is 690 mm wide and 1,090 mm long with a thickness of 9.6 mm. Each cathode weighs 63 kg.

Each bundle is 370 mm high and 1,380 mm long with a weight of 2,000 kg.

Further information and assistance is available from Glencore Nikkelverk's technical and sales personnel.

* Please note dimensions and weights are approximations.



The Quality Management System for the production of copper products at Nikkelverk's refinery located in Kristiansand, Norway is ISO 9001, ISO 14001 and OHSAS 18001 registered.